



**HEAD OFFICE (U.A.E.):
FALES GRAND GENERAL TRADING L.L.C.**

**REGIONAL OFFICE (P.R.C.):
QINGDAO FALES GRAND INT'L CO., LTD.
www.falesgrand.com
contact@falesgrand.com**

PCR/LTR/TBR/OTR

TIRE CATALOGUE



WWW.FALESGRAND.COM

COMPANY PROFILE

Fales Grand, one of the leading international trading companies based in Dubai - U.A.E with its wholly owned foreign subsidiaries in China, Iraq and Saudi Arabia. Being involved in the Tire, Tube and Automotive Battery business for last 25 years, Fales Grand Company earned wealth of experience to offer.

Ever since the company was established, we always have been going forward with positive and challenging mind to bring in all best products of China, South Korea to region such as Asia, Middle East, Africa, and European countries.

Our mission is "Transforming Vision into Reality" and to achieve this, we aim to provide quality products, strive to keep ourselves up-to-date in technologies and resolutions that meet all generation requirements. At the pinnacle our priority is to foster our customer's profitability by serving private OEM brands, exclusive selling-rights at very competitive prices, full range of point-of-sale materials. Developing a Corporate Culture that enhances the value of our business, expand opportunities for the growth of an objective to provide easy access to our products and services round the clock. For more information please visit our website www.falesgrand.com.



*Transforming
Vision into
Reality...*



Content

PASSENGER CAR RADIAL & LIGHT TRUCK RADIAL

Cruise	2
Drift	3
Enduring	4
Energize	5
Stellar	6
DS01	7
Avenue / Delta	8
Span / Trail	9
Orbit / Rough	10
Agile / Elevate	11
Brisk / Voltage	12
Vision / Astra	13
Envoy / Maxim	14
Premier / Alto	15
Grip / Brawn	16
Raptor / Rapid	17
Flash / Pantherex	18
Force 2X / Force	19
Clawmax / Traxion	20
Treadon / Elvix	21
Capacity / Navigation	23
Dynamic / Dynamic Plus	24
Powermax / Robust	25
Strength / Active	26
DS809 / DS801	27
CS118 / CS130	28
Cosmo / Performer	29
Rough SR / Roger	30
Trekking / Zeal	31
Zeal Plus / Magnetic	32
Orion / CS700	33
CS702 / CS706	34
CS7088 / CS7188	35
Gear / Delight	36

TRUCK AND BUS RADIAL

CS504 / CS520	38
CS555 / CS580	39
CS716 / CS717	40
CS719 / CS718	41
CS770 / CS760	42
DS706 / CS820	43
CS850 / CS888	44
CS900 / CS878	45
CS26 / CS625	46
CS582 / CS910	47
Radiant / Vega	48
Baron / Turbo	49
CSE608 / CSE908	50
CSE162 / CSE601	51
CSE572 / CSE602	52
CSE605 / CSE610	53
CS678 / CS775	54
CS776 / CS778	55
CS999 / CS602	56

BIAS OTR

L-3 NEW / G2	58
E-3/L-3	59
SH-278 / R4	60
R4-1 / L2	61
SH-308 / SH-338	62
R1	63
SH-358 / SH-378	64
L5 / F2	65
F3 / L4 / CS3N	66
SH628 / CS620+	67

RADIAL OTR

E-3/L-3 / L3	69
--------------	----



PASSENGER CAR RADIAL



CRYSTAL
TIRE
for confident drive...

Cruise

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Inflation Pressure(kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
175/65R14	Cruise	82	H	5J	475	300	177	584	8.0
185/60R15	Cruise	84	H	5 1/2J	500	300	189	603	8.0
185/65R15	Cruise	88	H	5 1/2J	560	300	189	621	8.0
195/60R15	Cruise	88	V	6J	560	300	201	615	8.0
195/65R15	Cruise	91	V	6J	615	300	201	635	7.5
205/60R15	Cruise	91	H	6J	615	300	209	627	8.0
205/65R15	Cruise	94	V	6J	670	300	209	647	8.0
215/70R15	Cruise	98	T	6 1/2J	750	300	221	683	8.2
215/60R16	Cruise	95	V	6 1/2J	690	300	221	664	8.0
225/60R16	Cruise	98	V	6 1/2J	750	300	228	676	8.0



Super Handling

Super Low Noise

Super Anti-wear

PASSENGER CAR RADIAL





Drift

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Inflation Pressure(kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
205/50R17	Drift	93	W	6 1/2J	650	340	214	638	8.0
215/45R17	Drift	91	W	7J	615	340	213	626	8.0
215/50R17	Drift	95	W	7J	690	340	226	648	8.0
215/55R17	Drift	94	W	7J	670	300	226	668	8.0
225/45R17	Drift	94	W	7 1/2J	670	340	225	634	8.0
225/40R18	Drift	92	W	8J	630	340	230	637	8.0
225/45R18	Drift	95	W	7 1/2J	690	340	225	659	8.0
235/45R18	Drift	98	W	8J	750	340	236	669	8.0
235/55R18	Drift	104	V	7 1/2J	900	340	245	715	8.0
245/45R18	Drift	100	W	8J	800	340	243	677	8.0
235/55R19	Drift	105	V	7 1/2J	925	340	245	741	8.0

Super Handling

Super Low Noise

Super Comfortable



3

PASSENGER CAR RADIAL



CRYSTAL
TIRE

Enduring

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
145/70R12	Enduring	69	T	4.50B	325	300	150	509	6.5
155/65R13	Enduring	73	T	4.50B	365	300	157	532	7.5
155/70R13	Enduring	75	T	4.50B	387	300	157	548	7.5
165/65R13	Enduring	77	T	5.00B	412	300	170	544	7.5
165/70R13	Enduring	79	H	5.00B	437	300	170	562	7.5
165/80R13	Enduring	83	T	4.50B	487	300	165	594	7.5
175/60R13	Enduring	77	T	5J	412	300	177	540	7.5
175/70R13	Enduring	82	T	5.00B	475	300	177	576	7.5
185/70R13	Enduring	86	T	5.50B	530	300	189	590	8.0
165/70R14	Enduring	81	T	5J	462	300	170	588	7.5
175/70R14	Enduring	84	T	5J	500	300	177	602	8.0
185/60R14	Enduring	82	H	5 1/2J	475	300	189	578	7.5
185/65R14	Enduring	86	T	5 1/2J	530	300	189	596	7.5
185/70R14	Enduring	88	T	5 1/2J	560	300	189	616	8.0
195/70R14	Enduring	91	T	6J	615	300	201	630	8.0
205/60R14	Enduring	88	T	6J	560	300	209	602	7.5
205/70R15	Enduring	96	T	6J	710	300	209	669	8.0



Super Handling

Super Low Noise

Super Anti-wear

PASSENGER CAR RADIAL

CRYSTAL
TIRE

4

Energize

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
165/60R14	Energize	75	H	5J	387	300	170	554	7.2
165/65R14	Energize	79	T	5J	437	300	170	570	7.2
185/70R14	Energize	88	H	5 1/2J	560	300	189	616	8.0
195/55R15	Energize	85	V	6J	515	300	201	595	8.0
195/60R15	Energize	88	H	6J	560	300	201	615	8.0
195/65R15	Energize	91	V	6J	615	300	201	635	8.0
205/65R15	Energize	94	V	6J	670	300	209	647	8.5
225/60R15	Energize	96	V	6 1/2J	710	300	228	651	8.0
195/50R16	Energize	84	V	6J	500	300	201	602	8.0
205/55R16	Energize	91	V	6 1/2J	615	300	214	632	8.0
205/60R16	Energize	92	V	6J	630	300	209	652	8.0
205/65R16	Energize	95	H	6J	690	300	209	672	8.0
215/65R16	Energize	98	H	6 1/2J	750	300	221	686	8.0
235/60R16	Energize	100	H	7J	800	300	240	688	8.0
215/55R17	Energize	94	V	7J	670	300	226	668	8.0
225/55R17	Energize	101	H	7J	825	340	233	680	8.0
225/60R17	Energize	99	H	6 1/2J	775	300	228	702	8.0
225/65R17	Energize	102	H	6 1/2J	850	300	228	724	8.0
235/65R17	Energize	104	H	7J	900	300	240	738	8.0

Super Handling

Super Low Noise

Super Comfortable



5

PASSENGER CAR RADIAL



CRYSTAL
TIRE

Stellar

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Inflation Pressure(kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
175/70R13	Stellar	82	T	5J	475	300	177	576	7.2
175/70R14	Stellar	84	T	5J	500	300	177	602	7.2
185/70R14	Stellar	88	T	5 1/2J	560	300	189	616	7.2
195/70R14	Stellar	91	T	6J	615	300	201	630	7.5
205/60R14	Stellar	88	H	6J	560	300	209	602	7.5
185/65R15	Stellar	88	H	5 1/2J	560	300	189	621	7.2
195/60R15	Stellar	88	V	6J	560	300	201	615	7.5
195/65R15	Stellar	91	V	6J	615	300	201	635	7.5
205/60R15	Stellar	91	H	6J	615	300	209	627	7.5
205/65R15	Stellar	94	V	6J	670	300	209	647	7.5
205/55R16	Stellar	94	W	6 1/2J	670	350	214	632	7.5
205/60R16	Stellar	92	V	6J	630	300	209	652	7.5
205/65R16	Stellar	94	V	6J	690	300	209	672	7.5
215/60R16	Stellar	99	V	6 1/2J	775	350	221	664	7.5
215/65R16	Stellar	98	V	6 1/2J	750	300	221	686	7.5
215/55R17	Stellar	98	W	7J	750	350	226	668	7.5



Super Handling

Super Low Noise

Super Comfortable

PASSENGER CAR RADIAL



6

DS01

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Inflation Pressure(kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
215/75R15	DS01	100	T	6J	800	300	216	703	8.7
225/70R16	DS01	103	T	6 1/2J	875	300	228	722	8.7
265/70R16	DS01	112	H	8J	1120	300	272	778	8.7
225/60R17	DS01	99	H	6 1/2J	775	300	228	702	8.4
265/70R17	DS01	115	H	8J	1215	300	272	804	8.7
235/60R18	DS01	107	H	7J	975	340	240	739	8.4
245/45R19	DS01	98	H	8J	750	300	243	703	8.4

Super Handling

Super Low Noise

Super Anti-wear



7

PASSENGER CAR RADIAL



CRYSTAL
TIRE

Avenue

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
235/75R15	105	T	6 1/2J	925	300	235	733	8.2



Delta

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
245/45ZR20	103	W	8J	875	340	243	728	8.0
265/50ZR20	111	W	8 1/2J	1090	340	277	774	8.0
285/50ZR20	116	W	9J	1250	340	297	794	8.0



PASSENGER CAR RADIAL



Span



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
225/65R17	102	H	6 1/2J	850	300	228	724	8.0
235/65R17	104	H	7J	900	300	240	738	8.0
225/60R18	100	H	6 1/2J	800	300	228	727	8.0

Trail



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
215/70R16	100	H	6 1/2J	800	300	221	708	8.0

Orbit

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
175/70R13	82	T	5B	475	300	177	576	7.0
185/70R13	86	T	5 1/2B	530	300	189	590	6.5
175/70R14	84	T	5J	500	300	177	602	7.0
185/65R15	88	H	5 1/2J	560	300	189	621	7.0
195/65R15	91	H	6J	615	300	201	635	7.0
205/55R16	91	H	6 1/2J	615	300	214	632	7.0
205/60R16	92	H	6J	630	300	209	652	7.5
215/60R16	99	H	6 1/2J	775	340	221	664	7.0

Rough

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
175/65R14	82	T	5J	475	300	177	584	7.7
185/65R14	86	T	5 1/2J	530	300	189	596	7.0
185/70R14	88	T	5 1/2J	560	300	189	616	7.0
195/70R14	91	T	6J	615	300	201	630	7.0
195/60R15	88	H	6J	560	300	201	615	7.7
205/65R15	94	H	6J	670	300	209	647	7.0
225/45ZR17	94	W	7 1/2J	670	340	225	634	7.0



PASSENGER CAR RADIAL



10

Agile



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195/60R15	88	H	6J	560	300	201	615	7.2
215/65R15	96	H	6 1/2J	710	300	221	661	7.5

Elevate



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
265/65R17	112	T	8J	1120	300	272	776	8.0
265/60R18	110	H	8J	1060	300	272	775	8.0
265/65R18	114	T	8J	1180	300	272	801	8.0
285/60R18	116	H	8 1/2J	1250	300	292	799	8.0
235/55R19	105	V	7 1/2J	925	340	245	741	8.0
275/40ZR20	106	W	9 1/2J	950	340	278	728	8.0

Brisk

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195/55R16	91	V XL	6J	615	340	201	620	8.0
205/55R16	91	V	6 1/2J	615	300	214	632	7.8
205/65R16	95	H	6J	690	300	209	672	8.0
215/45ZR17	91	W XL	7J	615	340	213	620	7.5
215/50ZR17	95	W XL	7J	690	340	226	648	8.0
215/55ZR17	94	W	7J	750	340	226	668	8.0
225/45ZR18	95	W XL	7 1/2J	690	340	225	659	7.5



Voltage

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
255/70R16	111	T	7 1/2J	1090	300	260	764	8.5



PASSENGER CAR RADIAL



12

Vision



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
165/70R13LT	88/85	S	5.00B	560/515	450	170	562	8.5

Astra



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
255/70R15C	113/110	S	7 1/2J	1150/1060	450	260	739	8.0
205R/16C	110/108	R	6J	1060/1000	450	208	736	9.5
265/70R16	112	T	8J	1120	300	272	778	8.0
265/65R17	112	S	8J	1120	300	272	776	8.3
265/60R18	110	H	8J	1060	300	272	775	8.0
285/60R18	116	T	8 1/2J	1250	300	292	799	8.0

Envoy

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
205/45R16	87	W	7J	545	340	206	590	8.0
205/45R17	88	W	7J	560	340	206	616	8.2



Maxim

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
235/70R16	106	H	7J	950	300	240	736	9.3
245/70R16	111	H	7J	1090	340	248	750	9.3
265/70R16	112	T	8J	1120	300	272	778	9.3
265/65R17	112	H	8J	1120	300	272	776	9.3
265/70R17	115	H	8J	1215	300	272	804	9.3
235/60R18	107	H	7J	975	340	240	739	9.3
245/60R18	105	H	7J	925	300	248	751	9.3
265/60R18	114	H	8J	1180	340	272	775	9.3



PASSENGER CAR RADIAL

Premier



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
205/75R14	95	S	5 1/2J	690	300	203	664	7.8
215/75R15	100	S	6J	800	300	216	703	7.8

Alto



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
285/45ZR22	114	Y	9 1/2J	1180	340	285	815	8.0

15

PASSENGER CAR RADIAL



Grip

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
265/65R18	114	H	8J	1180	300	272	801	7.6
285/50R20	116	V XL	9J	1250	340	297	794	7.6



Brawn

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
175/70R13	82	T	5.00B	475	300	177	576	7.0
185/70R13	86	T	5.50B	530	300	189	590	7.0
175/65R14	82	H	5J	475	300	177	584	7.5
185/65R14	86	H	5 1/2J	530	300	189	596	7.2
185/70R14	88	T	5 1/2J	560	300	189	616	7.2
195/70R14	91	T	6J	615	300	201	630	7.2
185/65R15	88	H	5 1/2J	560	300	189	621	7.5
195/65R15	91	H	6J	615	300	201	635	7.5
205/65R15	94	H	6J	615	300	209	647	7.2
205/55R16	91	H	6 1/2J	615	300	214	632	6.8
205/60R16	92	V	6J	630	300	209	652	7.5
215/60R16	95	H	6 1/2J	690	300	221	664	7.5



PASSENGER CAR RADIAL



Raptor



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
31X10.50R15LT W	109	Q	8 2/1J	1030	350	268	775	13.5
LT235/85R16 W	120/116	Q	6 2/1J	1380/1260	550	235	806	13.0

Rapid



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
31X10.50R15LT	109	Q	8 1/2J	1030	350	268	775	10.0
215/75R15	100	T	6J	800	300	216	703	8.5
215/70R16	99	T	6 1/2J	775	300	221	708	8.5
225/70R16	101	T	6 1/2J	825	300	228	722	8.5
LT235/85R16	120/116	Q	6 1/2J	1380/1260	550	235	806	10.0

Flash

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
225/55R18	98	H	7J	750	300	233	705	8.5



Pantherex

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
165/65R13	77	T	5.00B	412	300	170	544	7.6
175/70R13	82	T	5.00B	475	300	177	576	7.8



PASSENGER CAR RADIAL



18

Force 2X



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
145/70R12TL	69	Q	4.5B	325	250	150	509	4.5

Force



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
155/70R12TL	73	Q	4.50B	365	250	157	523	5.0

Clawmax

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
235/45ZR18	98	W XL	8J	750	340	236	669	7.4
235/55R19	101	W	7 1/2J	825	300	233	741	7.4



Traxion

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
155R13C 8PR 90/88		N	4.50B	600/560	450	160	578	7.5
165R13C 8PR 94/93		Q	4.50B	670/650	450	165	594	7.8
215/70R15C 109/107		R	6 1/2J	1030/975	450	221	683	9.2



PASSENGER CAR RADIAL



20

Treadon



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
235/65R17	104	H	7J	900	300	240	738	8.5
245/60R18	105	H	7J	925	300	248	751	8.3

Elvix



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
215/70R16	100	H	6 1/2J	800	300	221	708	7.8
265/70R16	112	H	8J	1120	300	272	778	7.8
225/65R17	102	H	6 1/2J	850	300	228	724	7.8
235/65R17	108	H	7J	1000	350	240	738	7.8
235/60R18	103	H	7J	875	300	240	739	7.8
235/55R19	105	V	7 1/2J	925	350	245	741	7.8



LIGHT TRUCK RADIAL



CRYSTAL
TIRE
for confident drive...



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
215R15C	112/110	S	6J	1120/1060	450	218	725	8.5

Navigation



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195R14CWSW 106/104		R	5 1/2J	950/900	450	198	666	9.0
195R14CBSW 106/104		R	5 1/2J	950/900	450	198	666	9.0
195R15C	106/104R	R	5 1/2J	950/900	450	196	691.4	9.2

23

LIGHT TRUCK RADIAL



CRYSTAL
TIRE

Dynamic



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12LT	88/86	Q	3.5B	560/530	550	143	568	7.3

Dynamic Plus



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R13LT	97/95	P	4.00B	730/690	625	160	620	8.0

LIGHT TRUCK RADIAL



24



Powermax



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195/70R15C	104/102	R	6J	900/850	450	201	655	9.0
225/70R15C	112/110	R	6 1/2J	1120/1060	450	228	697	9.0
185R14C B	102/100	R	5 1/2J	850/800	450	188	650	9.0
195 R14C	106/104	R	5 1/2J	950/900	450	198	666	9.0
195 R15C	106/104	R	5 1/2J	950/900	450	196	693	9.0
205 R14C	109/107	R	6J	1030/975	450	208	686	9.0

Robust



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
255/70R15C B	112/110	S	6.50J	1120/1060	375	258	734	9.0
205R16C B	110/108	R	6J	1060/1000	450	310	732	9.0

25

LIGHT TRUCK RADIAL



Strength

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
155R12C	88/86	S	4.50B	560/530	450	157	553	7.5



Active

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
205/70R15C	106/104	S	6.00J	950	450	209	669	8.5



LIGHT TRUCK RADIAL



26



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12LT	P	88/86	3.50B	615/600	550	143	568	9.5

DS801



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.50R12LT	P	92/90	4.00B	630/600	500	160	595	8.5

LIGHT TRUCK RADIAL



CRYSTAL
TIRE

CS118



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
6.50R16LT-10PR	107/102	L	5.50F	975	560	185	750	10.0
7.00R16LT-12PR TTF	115/110	M	5.50F	1215	670	200	775	10.0
7.00R16L-12PR TL	115/110	M	5.50F	1215	670	200	775	10.0
7.50R16LT-14PR TTF	122/118	L	6.00G	1500	770	215	805	10.5
7.50R16LT-14PR TL	122/118	L	6.00G	1500	770	215	805	10.5

CS130



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
6.50R16	107/102	N	5.50F	975	560	185	750	10.0

LIGHT TRUCK RADIAL





Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
205/70R15C106/104		S	6J	950	450	209	669	8.5

Performer



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12	88/86	P	3.50B	560	550	143	568	8.7

LIGHT TRUCK RADIAL



CRYSTAL
TIRE

Rough SR



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
7.50R16LT	112/107	M	6.00G	1120	460	215	805	10.0

Roger



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
LT5.50R12	92/90	P	3.50B	630	560	162	591	10.0

LIGHT TRUCK RADIAL



30



Trekking



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195R14LT	105/103	Q	5 1/2J	925	450	196	668	8.7
195R15LT	106/104	Q	5 1/2J	950	450	196	693	8.7

Zeal



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12	88/86	P	3.50B	560	550	143	568	10.0
5.50R13LT	97/95	P	4.00B	560	460	160	620	9.7

LIGHT TRUCK RADIAL



CRYSTAL
TIRE

Zeal plus

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12	88/86	P	3.50B	560	550	143	568	8.7



Magnetic

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195R14C	105/103	Q	5 1/2J	925	450	196	668	8.7



LIGHT TRUCK RADIAL



32



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
195R15C	106/104	Q	5 1/2J	950	450	196	693	8.7

CS700



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
6.50R15C	106/101	N	5.50F	950/825	560	185	730	8.0
6.50R16C	107/102	N	5.50F	975/850	560	185	750	8.2
7.00R16C	115/110	N	5.50F	1215/1060	670	200	775	8.2
7.50R16C	122/118	L	6.00G	1500/1320	770	215	805	9.5

CS702

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
215/70R16C	106/102	R	6 1/2J	950/875	450	221	708	9.5
205R16C	110/108	Q	6J	1060/1000	450	206	732	9.8



CS706

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
185R14C	102/100	S	5 1/2J	850/800	450	189	652	8.0
195R14C	105/103	S	5 1/2J	925/875	450	196	668	8.3
185R15C	103/102	Q	5 1/2J	875/850	450	189	677	8.0
195R15C	106/104	R	5 1/2J	950/900	450	196	693	8.3
205/70R15C	106/104	S	6J	950/900	450	209	669	8.5



LIGHT TRUCK RADIAL



34



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12LT	88/86	Q	3.50B	560/530	500	143	568	8.0

CS7188



Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
5.00R12LT	88/86	Q	3.50B	560/530	500	143	568	7.8

LIGHT TRUCK RADIAL



CRYSTAL
TIRE

Gear

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
185R14C	102/100	Q	5 1/2J	850	450	189	652	8.7



Delight

Size	Load Index	Speed Rating	Standard Rim	Max Load(kg)	Pressure (kPa)	Section Width(mm)	Overall Diameter(mm)	Pattern Depth (mm)
185R14C	102/100	R	5 1/2J	850	450	188	650	9.5



LIGHT TRUCK RADIAL



36



TRUCK AND BUS RADIAL



CRYSTAL
TIRE
for confident drive...



CS504

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
9.00R20	16	144/142	K	7.00	2800/2650	900/900	259	1019	15
10.00R20	18	149/146	K	7.50	3250/3000	930/930	278	1054	15
11.00R20	18	152/149	K	8.00	3550/3250	930/930	293	1085	17
12.00R20	20	156/153	K	8.50	3750/3450	830/830	315	1125	17.5
11R22.5	16	148/145	M	8.25	3150/2900	850/850	279	1054	15
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5

CS520

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
12R22.5	18	152/149	M	9.00	3550/3250	930/930	302	1087	20
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	23



TRUCK AND BUS RADIAL



38

CS555



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
11.00R20	18	152/149	K	8.00	3550/3250	930/930	293	1085	18

CS580



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	16.5
1200R24	20	160/157	K	8.50	4500/4125	900/900	315	1125	15.5

TRUCK AND BUS RADIAL



CRYSTAL
TIRE



CS716

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
750R16LT	14	122/118	M	6.00G	1500/1320	770/770	215	805	13
825R16LT	16	128/124	M	6.50H	1800/1600	770/770	235	855	16
9.00R20	16	144/142	K	7.00	2800/2650	900/900	259	1019	15.5
10.00R20	18	149/146	K	7.50	3250/3000	930/930	278	1054	16.5
11.00R20	18	152/149	K	8.00	3550/3250	930/930	293	1085	17
12.00R20	20	156/153	K	8.50	3750/3450	830/830	315	1125	17.5
12.00R24	20	160/157	K	8.50	4500/4125	900/900	315	1125	16
11R22.5	16	148/145	M	8.25	3150/2900	850/850	279	1054	15.5
12R22.5	18	152/149	M	9.00	3550/3250	930/930	300	1085	16
13R22.5	20	156/152(154/151)	L(M)	9.75	4000/3550	860/860	320	1124	16.5
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	17.5

CS717

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
11.00R20	18	152/149	K	8.00	3550/3250	930/930	293	1085	17.5
12.00R20	20	156/153	K	8.50	3750/3450	830/830	315	1125	18.5

TRUCK AND BUS RADIAL



40

CS719

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
295/80R22.5	18	152/149	M	9.00	3550/3250	900/900	298	1044	15



CS718

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
11.00R20	18	152/149	K	8.00	3550	930	286	1082	15





CS770

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
12.00R24	20	160/157	K	8.50	4500/4125	900/900	315	1125	19.0

CS760

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
12R22.5	18	152/149	M	9.00	3550/3250	930/930	300	1085	16.5
13R22.5	20	156/152(154/151)	L(M)	9.75	4000/3550	860/860	320	1124	17.0
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



TRUCK AND BUS RADIAL



42

DS706



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
14.00R20	20	164/161	K	10.00	5000	790	375	1253	20.3

CS820



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860	312	1076	23.0
13R22.5	20	156/152(154/151)	L(M)	9.75	4000/3550	860	320	1124	20.0



CS850

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15.5

CS888

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
12.00R24	20	160/157	K	8.50	4500	900/900	315	1125	20



TRUCK AND BUS RADIAL


CRYSTAL
TIRE

44

CS900

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
385/65R22.5	20	160	K	11.75	4500	900	389	1072	17



CS878

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15.5



45

TRUCK AND BUS RADIAL



CRYSTAL
TIRE



CS26

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
7.50R16	14	122/118	L	6.00G	1500	770	210	802	12

CS625

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
235/75R17.5	16	132/130	M	6.75	2000	775	233	797	12



TRUCK AND BUS RADIAL



46

CS582

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
12.00R24	20	160/157	K	8.50	4500/4125	900/900	315	1216	16



CS910

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
385/65R22.5	20	160	K	11.75	4500	900	389	1072	15.5



TRUCK AND BUS RADIAL



CRYSTAL
TIRE

Radiant

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
215/75R17.5	18	135/133	J	6.00	1700	700	211	767	17
265/70R19.5	18	143/141	J	7.50	2500	775	262	867	13
285/70R19.5	18	150/148	J	8.25	3000	900	283	895	15



Vega

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
205/75R17.5	16	125/123	M	6.00	1550	760	204	733	12



TRUCK AND BUS RADIAL



48

Baron

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
8.5R17.5	14	124/122	L	6.00	1450	625	215	802	133



Turbo

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
8.5R17.5	12	121/120	L	6.00	1450	625	215	802	13.3
9.5R17.5	16	129/127	L	6.75	1850	750	240	842	13.3
235/75R17.5	18	143/141	J	6.75	2725	875	233	797	13





Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	18



CSE908

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
315/80R22.5	20	157/154	M	9.00	4125/3750	900/900	312	1076	15



TRUCK AND BUS RADIAL



50

CSE162



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15

CSE601



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



CSE572

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15

CSE602

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



TRUCK AND BUS RADIAL



52

CSE605



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	18

CSE610



Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
315/80R22.5	20	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



CS678

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
7.50R16	14	121/118	N	6.0J	1450/1320	770	220	808	10.5

CS775

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
325/95R24	22	162/160	K	8.50	4750/4500	850/850	325	1228	17



TRUCK AND BUS RADIAL



54

CS776

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
12.00R24	20	160/157	K	8.50	4500/4125	900/900	238	1231	24



CS778

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
325/95R24	22	162/160	K	8.50	4750/4500	850/850	325	1228	19



TRUCK AND BUS RADIAL

55



CRYSTAL
TIRE



CS999

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
215/75R17.5	16	135/133	J	6.00	2180	850	211	767	12.5



CS602

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
9.5R17.5	18	143/141	M	6.75	2725	930	241	845	12



TRUCK AND BUS RADIAL



56



CRYSTAL
TIRE

BIAS OTR

falesgrand.com

L-3 NEW

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
20.5/70-16	14	TT	10.00	1600	390	353	915	16
16/70-20	18	TT	13.00	3350	450	410	1075	25
17.5-25	20	TT/TL	14.00	4250	400	445	1350	25
17.5-25	16	TT/TL	14.00	4250	300	445	1350	25
20.5-25	24	TT/TL	17.00	6700	400	520	1490	29
20.5-25	20	TT/TL	17.00	6000	325	520	1490	29
20.5-25	16	TT/TL	17.00	5450	275	520	1490	29
23.5-25	24	TT/TL	19.50	8000	350	595	1615	31
23.5-25	20	TT/TL	19.50	7300	300	595	1615	31
23.5-25	16	TT/TL	19.50	6150	225	595	1615	31
26.5-25	24	TT/TL	22.00/3.0	14000/9250	400/300	675	1750	35



G2

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
13.00-24	14	TT/TL	10.00	1600	390	353	915	16
14.00-24	18	TT/TL	13.00	3350	450	410	1075	25
15.5-25	16	TT/TL	12.00/1.3	3130	300	395	1275	24
17.5-25	24	TT/TL	19.50	8000	350	595	1615	31



BIAS OTR



CRYSTAL
TIRE

58

E-3/L-3

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
7.5-16	8	TT/TL	6.00G	1900	500	215	810	20
8.25-16	10	TT/TL	6.50H	1800	550	235	865	20
20.5/70-16	12	TT/TL	10.00G	2185/1890	300/250	480	1070	25
12.00-16	12	TT/TL	8.50	1245	390	244	884	20
14/90-16	16	TT/TL	8.5H	1245	290	215	896	16
16/70-20	18	TT/TL	13.00	3350	450	410	1075	25
14.00-24	16	TT/TL	10.00	4000	375	375	1370	24
14.00-24	20	TT/TL	10.00	4625	475	375	1370	24
14.00-24	24	TT/TL	10.00	5150	575	375	1370	24
16.00-24	16	TT/TL	11.25	4875	325	430	1490	26
16.00-24	20	TT/TL	11.25	5450	400	430	1490	26
16.00-24	24	TT/TL	11.25	6000	475	430	1490	26
16/70-24	14	TT/TL	133.0	3375	350	410	1175	25
18.00-24	32	TT/TL	13.00	1500	750	495	1615	28
15.5-25	12	TT/TL	12.00	3250	250	395	1275	24
16.00-25	32	TT/TL	11.25	12500	875	430	1490	26
17.5-25	16	TT/TL	14.00	4250	300	445	1350	25
17.5-25	20	TT/TL	14.00	4250	400	445	1350	25
18.00-25	36	TT/TL	13.00	16000	850	495	1615	28
20.5-25	16	TT/TL	17.00	5450	275	520	1490	29
20.5-25	20	TT/TL	17.00	6000	325	520	1490	29
20.5-25	24	TT/TL	17.00	6700	400	520	1490	29
23.5-25	16	TT/TL	19.50	6150	225	595	1615	31
23.5-25	20	TT/TL	19.50	7300	300	595	1615	31
23.5-25	24	TT/TL	19.50	8000	350	595	1615	31
26.5-25	24	TT/TL	22.00	8250	250	645	1743	35
26.5-25	28	TT/TL	22.00	9250	300	645	1743	35
26.5-25	32	TT/TL	22.00	10000	350	645	1743	35
29.5-25	28	TT/TL	25.00	11500	325	710	1840	36



BIAS OTR



CRYSTAL
TIRE

59

SH-278

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
5.00-8	10	/	3.50D	1290	100	137	470	10
6.00-9	10	/	4.00E	1680	860	160	540	11.5
7.00-9	10	/	5.00S	2145	850	190	590	13
6.05-10	10	/	5.00S	2170	510	175	510	13.5
7.00-12	12	/	5.00S	2720	860	190	676	15
8.25-12	12	/	7.00	2850	790	235	696	15
28*9-15	12	/	7.00	3035	700	230	700	17
7.50-15	12	/	6.00	2650	790	215	808	15
8.25-15	14	/	6.50	3700	800	235	840	17
7.00-15	12	/	5.50	2870	860	200	750	15



R4

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
16.9-24	10	TL	W15L	2230	200	430	1335	/
17.5L-24	8	TL	W15L	1500	150	445	1265	/
19.5L-24	10	TL	DW16	1925	170	495	1340	/
21L-24	10	TL	DW18	2090	150	533	1400	/
16.9-28	10	TL	W15L	2380	200	430	1435	/
18.4-26	12	TL	DW16	4000	250	467	1450	/



BIAS OTR



CRYSTAL
TIRE

60

R4-1

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
10.5/80-18	10	TL	9.00	1935	370	279	875	/
12.5/80-18	12	TL	9.00	2625	370	317	940	/



L2

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
10-16.5	8	TL	8.25	1880	410	264	770	21
12-16.5	10	TL	9.75	2540	450	307	840	21
14-17.5	14	TL	10.50	3875	550	350	920	22
15-19.5	14	TL	11.75	4565	480	390	1020	22



SH-308

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
14.00-20	18	/	10.00	3270	425	330	1215	9



SH-338

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
14.00-20	18	/	10.00	3270	425	330	1215	9



BIAS OTR



62

R1

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
4.00-8	6	/	3.00D	260	360	110	425	13
5.00-12	4	/	4.00E	280	200	145	590	15
6.00-12	6	/	4.50E	450	330	165	640	20
5.50-13	8	/	4.00E	280	345	145	610	15
10.0/75-15.3	10	/	9.00	1525	390	264	760	28.5
6.00-16	6	/	4.50E	495	250	165	745	19
7.50-16	6	/	5.50F	450	210	205	810	21
5.50-17	6	/	4.00E	780	520	140	750	18
7.50-20	6	/	5.50F	760	210	205	910	21
8.30-20	6	/	W7	705	230	210	895	24
9.50-20	8	/	W8	955	290	240	1050	25
16/70-20	12	/	14.00	3288	290	406	1075	32
11.2-24	8	/	W10	1225	240	285	1105	26
12.4-24	8	/	W11	1415	230	315	1160	29
13.6-24	10	/	W12	1790	250	345	1210	30
14.9-24	8	/	W15L	1530	179	378	1265	22
15-24	10	/	W14	2800	280	400	1310	32
16.9-24	10	/	W15L	2230	200	430	1335	33
8.30-24	6	/	W7	810	240	210	995	24
9.50-24	8	/	W8	1110	280	240	1050	25
14.9-26	6	/	W13	1560	140	378	1315	32
18.4-26	10	/	DW16	2645	180	467	1450	35
23.1-26	10	/	DW20	3245	140	554	1542	36
11.2-28	10	/	W10	1490	310	285	1205	28
12.4-28	8	/	W11	1510	230	315	1260	29
13.6-28	8	/	W12	1645	200	345	1310	31
14.9-28	8	/	W13	1800	180	378	1365	34
16.9-28	10	/	W15L	2380	200	430	1435	35
14.9-30	6	/	W13	1665	140	378	1415	32
16.9-30	10	/	W15L	2455	200	447	1499	36
18.4-30	10	/	W16L	2815	180	467	1550	36
11-32	10	/	W10	1460	250	305	1360	28
16.9-34	10	/	W15L	2605	200	429	1585	36
18.4-34	10	/	W16L	2990	180	467	1655	36
11.2-38	10	/	10.00	1180	221	284	1448	32
12-38	8	/	11.00	1570	140	298	1563	35
13.6-38	10	/	W12	2215	250	328	1548	34
15.5-38	10	/	W14L	1760	207	391	1549	34
16.9-38	10	/	W15L	2760	200	464	1685	36
18.4-38	10	/	W16L	3165	180	467	1755	37
20.8-38	12	/	W18L	4000	200	528	1835	38
18.4-42	10	/	W16	3330	180	467	1857	35



BIAS OTR

63



SH-358

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
12.00-20	12	/	8.50	4750	580	290	1150	15



SH-378

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
14.00-20	18	/	10.00	3270	425	330	1215	9
16.00-20	18	/	11.25	4800	400	430	1390	10



BIAS OTR



CRYSTAL
TIRE

64

L-5

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
17.5-25	16	/	14.0/1.50	7300	475	445	1400	60
20.5-25	20	/	17.0/3.00	9500	450	520	1550	66
23.5-25	20	/	19.5/2.50	10900	375	595	1675	72
26.5-25	28	/	22.0/3.00	15500	475	675	1800	82
29.5-25	28	/	25.0/3.50	17500	425	750	1920	90
29.5-25	32	/	25.0/3.50	19500	500	750	1920	90
20.5/70-16	14	/	10.00G	1600	350	356	955	46
16/70-20	14	/	13(SDC)	5150/2900	450/350	410	1090	50
16/70-20	16	/	13(SDC)	5480/3150	500/400	410	1090	50



F2

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
750-16	/	/	5.50F	870	370	205	810	/
750-18	10	/	5.50F	945	370	205	860	12
10.00-16	12	/	W8L	1325	340	275	910	21
11.00-16	12	/	W10L	1485	310	315	970	24



65

BIAS OTR



CRYSTAL
TIRE

F3

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
10.0/75-15.3	/	/	9.00	1550	390	264	760	/
11.5/80-15.3	/	/	9.00	2180	410	290	745	/



L4

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
17.5-15	20	/	14.00/1.5	8250/5000	575/400	445	1400	45



CS3N

Size	PR	Load index	Speed Rating	STD.RIM	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflater(mm)	Pattern Depth (mm)
23.5R25	★★	201	A2	19.50/2.5	14500	600	595	1615	33



BIAS OTR



CRYSTAL
TIRE

66

SH628

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
400-8	/	/	3.00D	225	275	112	415	/



CS620+

Size	PR	TYPE	Speed Rating	STD.RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
14.00-20	20	TT	-	10.0W	2360	245	375	1220	8



67

BIAS OTR



CRYSTAL
TIRE



CRYSTAL
TIRE

OTR RADIAL

falesgrand.com




E-3/L-3

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
17.5R25	/	TL	14.00/1.5	8500	650	445	1348	27
20.5R25	/	TL	17.00/2.00	11500	650	521	1493	31



L3

Size	PR	TYPE	STANDARD RIM	Max.Load (kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflator(mm)	Pattern Depth (mm)
23.5R25	/	TL	19.50/2.5	14500	650	597	1617	33
26.5R25	/	TL	22.00/3.0	18500	650	673	1750	36
29.5R25	/	TL	25.00/3.5	22400	650	749	1874	39

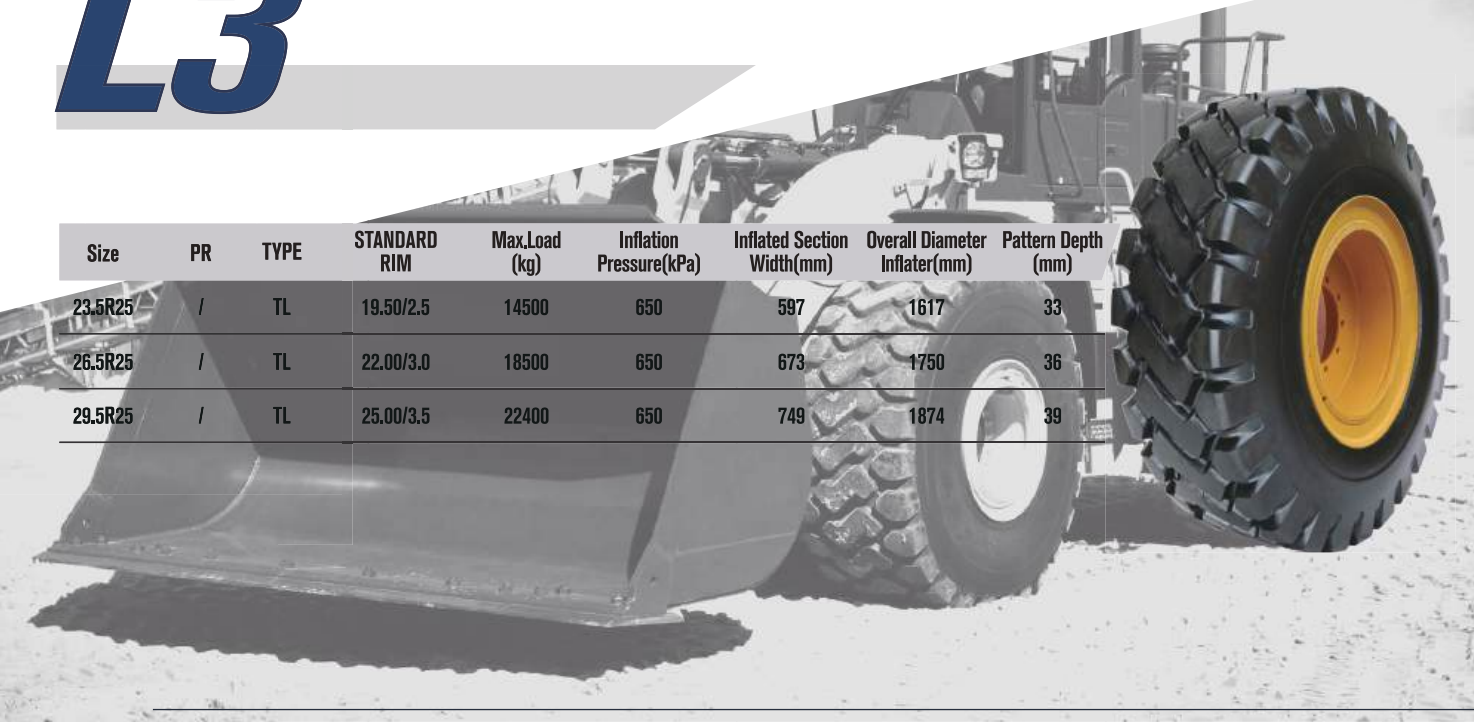

BIAS OTR

